



## INSTRUCTION OF THE REMOTE CONTROL FOR CCT PANEL

### MANNEL FOR THE REMOTE CONTROL

#### 1. Diagram

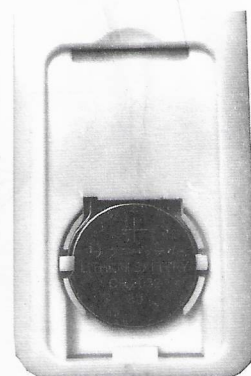

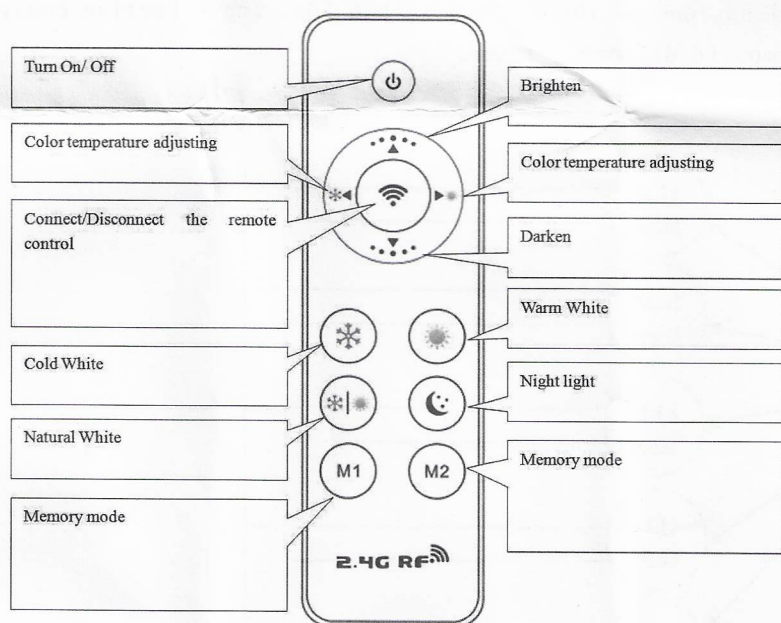


Remote battery type: CR2032 3V


#### 2. Technical Parameter:


PCB No.	Emission Frequency	Stand-by Power Consumption	Operating Current
V1.0	2400-2483.5MHz	3uA	12mA
Remote Control Distance	Modulation System	Transmitting Power	Battery
50M	GFSK	10dB	button cell

#### 3. Basic Function:



- ①. Connect the remote control: The remote control must connect with led panel through 2.4G signal before use, or it is useless. Press the key  3times within 5 seconds after getting through the electricity, in the meantime the light flash 3times, the remote control is set successfully, the lamp could be turned on /off by key  after setting; and in the case of turning on the lamp. the other function of the remote control is working.
- ②. Disconnect the remote control: In some special case, it need to be terminated the panel is connected to the control of the remote control, the way is: press the key  5times within 5 seconds after getting through the electricity, in the meantime the light flash 3times, the remote control is released successfully, the remote control couldn't control this lamp anymore.

- ③. Multiple control : it could be controlled many lamps by one remote control ,The premise is to use the same remote control to connect the led panel respectively,for example: all lamps



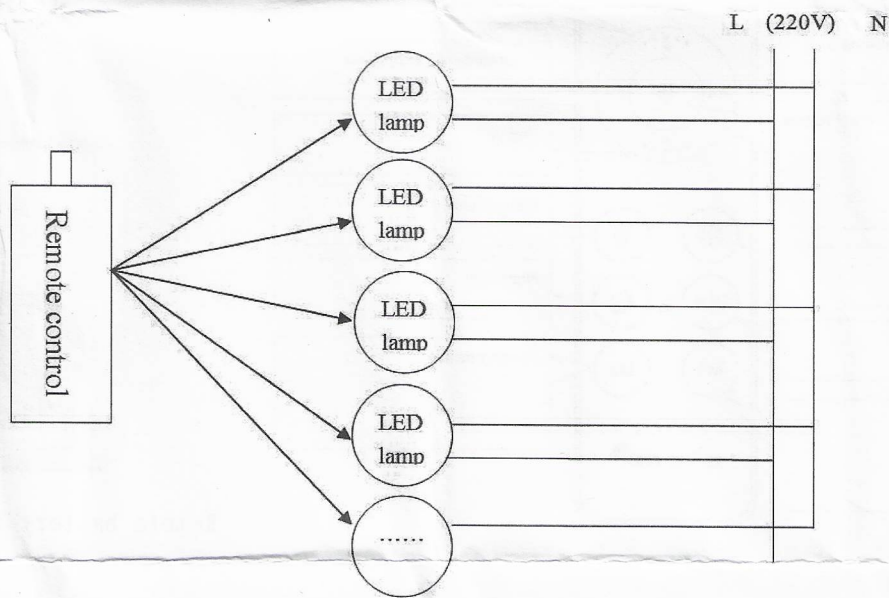

will be changed to Natural white when press key  . Theoretically ,one remote control could control many lamps(>100pcs) as long as the distant within 50m, the effective control distant may be shorten if the lamps in different rooms.







One remote control control N lamps in the same time

- ④. Color temperature adjustable and dimming: press or long press  is rise up or down the color temperature; press or long press  is dimming the brightness of the lamp , brighten or darken.

- ⑤. Memory function :remember the change of the lamp status every time

- ⑥. lamp mode: Turn on the lamp, press  , the light switch to Natural white; press  , the light switch to warm white; press  , the light switch to Natural white; press  , the light switch to nigh light status, At that moment, the brightness of lamps turn into the dim light, power consumption is greatly reduced.

- ⑦. Status memory function: After turning on the lamp, please adjust to the favorite light, long press  or  , the lamp will store this status, No matter how to adjust the lamps , only if you press  or  , the lamp will be adjusted to your favorite light.

- ⑧. Normally ,The battery of the remote control, life in a year or so, if the remote control is out of control ,like error sensitivity or slow response, please replace the battery in time.