


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:229.9V I:0.1567A P:34.01W PF:0.9442 Lamp Flux:3646.9x1 lm		
NAME: LED Linear Panel Light	TYPE:600x600	WEIGHT:
DIM.: 590*590*16mm	SPEC.:	SERIAL No.:
MFR.: Tsong	SUR.:0.573*0.573-0.543*0.543	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 107.23 lm/W			
MODEL	UFSC-FT918+	I _{max} (cd)	1086	S/MH(C0/180)	1.30
NOMINAL POWER(W)	34	LOR(%)	100.0	S/MH(C90/270)	1.30
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	3646.9	η UP, DN(C0-180)	0.0, 49.6
NOMINAL FLUX(lm)	3646.9	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 50.4
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	229.8	η down(%)	100.0	CIBSE SHR MAX	1.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

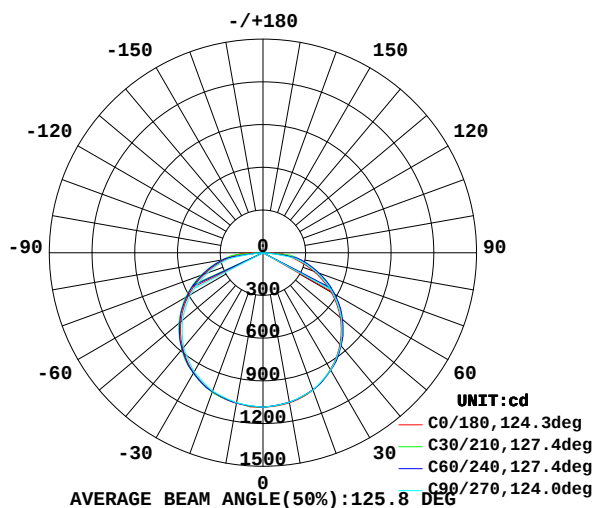

PLANAR ISOLUX DIAGRAM(UNIT:lx)

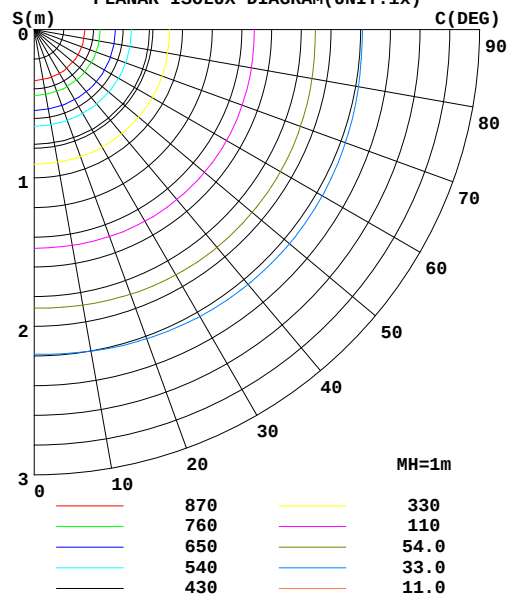


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:01
 Test Date:2021-3-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.275
 Humidity:45%
 Test Distance:14.900m [K=1.0000]
 Remarks: 590*590

ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	ϕ zone	ϕ total	%lum
5	1080	1076	1076	1079	1086	1080	1077	1076	0- 5	25.83	25.83	0.71
10	1070	1065	1067	1068	1073	1071	1070	1066	5- 10	76.76	102.6	2.81
15	1052	1049	1046	1057	1060	1060	1052	1052	10- 15	125.8	228.4	6.26
20	1026	1023	1026	1034	1039	1039	1034	1027	15- 20	171.7	400.1	11
25	991.0	992.4	989.0	1007	1010	1016	1000.0	998.9	20- 25	213.0	613.1	16.8
30	947.3	953.0	951.8	971.6	973.1	980.7	965.9	961.0	25- 30	248.3	861.4	23.6
35	896.9	906.2	900.1	927.5	929.0	937.4	915.9	915.1	30- 35	276.7	1138	31.2
40	840.3	856.2	848.5	879.6	876.5	890.4	865.9	865.9	35- 40	297.2	1435	39.4
45	777.3	794.5	783.7	821.3	817.6	832.6	801.9	805.3	40- 45	309.3	1745	47.8
50	707.7	732.0	718.8	761.5	752.6	773.6	737.9	743.7	45- 50	312.5	2057	56.4
55	633.2	658.9	642.7	689.9	681.6	702.2	661.9	670.8	50- 55	306.7	2364	64.8
60	551.3	585.2	566.6	617.0	604.9	629.6	585.8	597.3	55- 60	291.9	2656	72.8
65	465.6	504.0	482.2	537.0	523.6	548.5	499.8	515.3	60- 65	268.9	2925	80.2
70	378.1	422.1	397.9	455.3	437.8	465.0	413.7	432.0	65- 70	238.0	3163	86.7
75	291.3	339.5	313.8	371.4	349.9	378.9	328.1	347.1	70- 75	201.4	3364	92.2
80	211.6	265.6	229.7	291.4	264.3	297.3	242.5	270.0	75- 80	161.4	3525	96.7
85	151.9	91.98	0	100.9	189.5	102.9	0	92.96	80- 85	102.0	3627	99.5
90	8.643	0	0	0	81.23	0	0	0	85- 90	19.44	3647	100
95									90- 95			
100									95-100			
105									100-105			
110									105-110			
115									110-115			
120									115-120			
125									120-125			
130									125-130			
135									130-135			
140									135-140			
145									140-145			
150									145-150			
155									150-155			
160									155-160			
165									160-165			
170									165-170			
175									170-175			
180									175-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

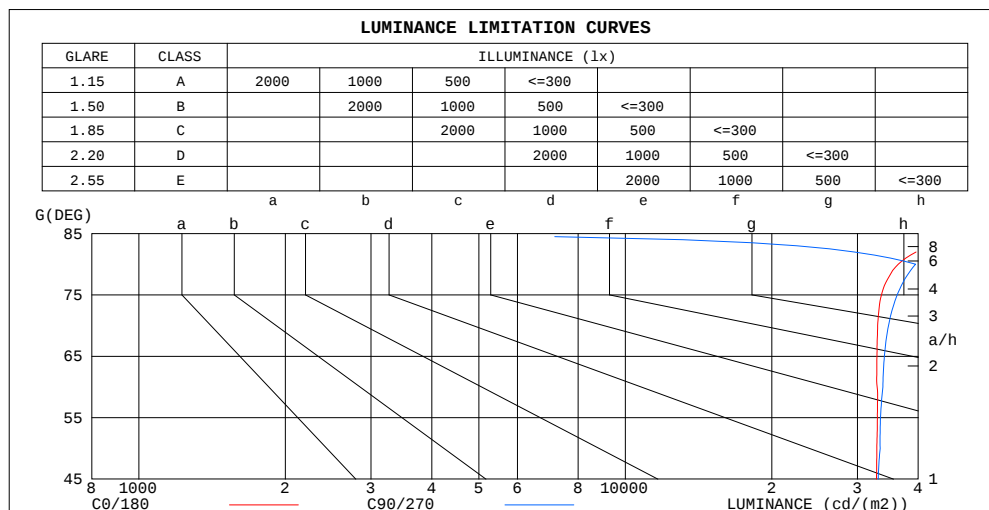

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	52048	0
80	36403	39515
75	33612	36214
70	33017	34747
65	32906	34083
60	32933	33848
55	32974	33469
50	32886	33402
45	32834	33102


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: 01
 Test Date: 2021-3-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000H_V1 SYSTEM V2.0.275
 Humidity: 45%
 Test Distance: 14.900m [K=1.0000]
 Remarks: 590*590

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:229.9V I:0.1567A P:34.01W PF:0.9442 Lamp Flux:3646.9x1 lm		
NAME: LED Linear Panel Light	TYPE:600x600	WEIGHT:
DIM.: 590*590*16mm	SPEC.:	SERIAL No.:
MFR.: Tsong	SUR.:0.573*0.573-0.543*0.543	PROTECTION ANGLE:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.02	.97	.93	.90	.95	.91	.95	.92	.88	.91	.88	.86	.88	.85	.83	.81
2.0	.88	.80	.74	.86	.79	.73	.82	.76	.71	.79	.74	.70	.76	.72	.68	.66
3.0	.76	.68	.60	.75	.67	.60	.72	.65	.59	.69	.63	.58	.66	.61	.57	.54
4.0	.67	.58	.51	.66	.57	.50	.63	.56	.50	.61	.54	.49	.59	.53	.48	.46
5.0	.60	.50	.43	.59	.50	.43	.56	.48	.42	.54	.47	.42	.52	.46	.41	.39
6.0	.54	.44	.37	.53	.44	.37	.51	.43	.37	.49	.42	.36	.47	.41	.36	.34
7.0	.48	.39	.33	.48	.39	.33	.46	.38	.32	.44	.37	.32	.43	.37	.32	.30
8.0	.44	.35	.29	.43	.35	.29	.42	.34	.29	.41	.34	.29	.39	.33	.28	.26
9.0	.40	.32	.26	.40	.32	.26	.39	.31	.26	.37	.31	.26	.36	.30	.26	.24
10.0	.37	.29	.24	.37	.29	.23	.36	.28	.23	.35	.28	.23	.34	.28	.23	.21

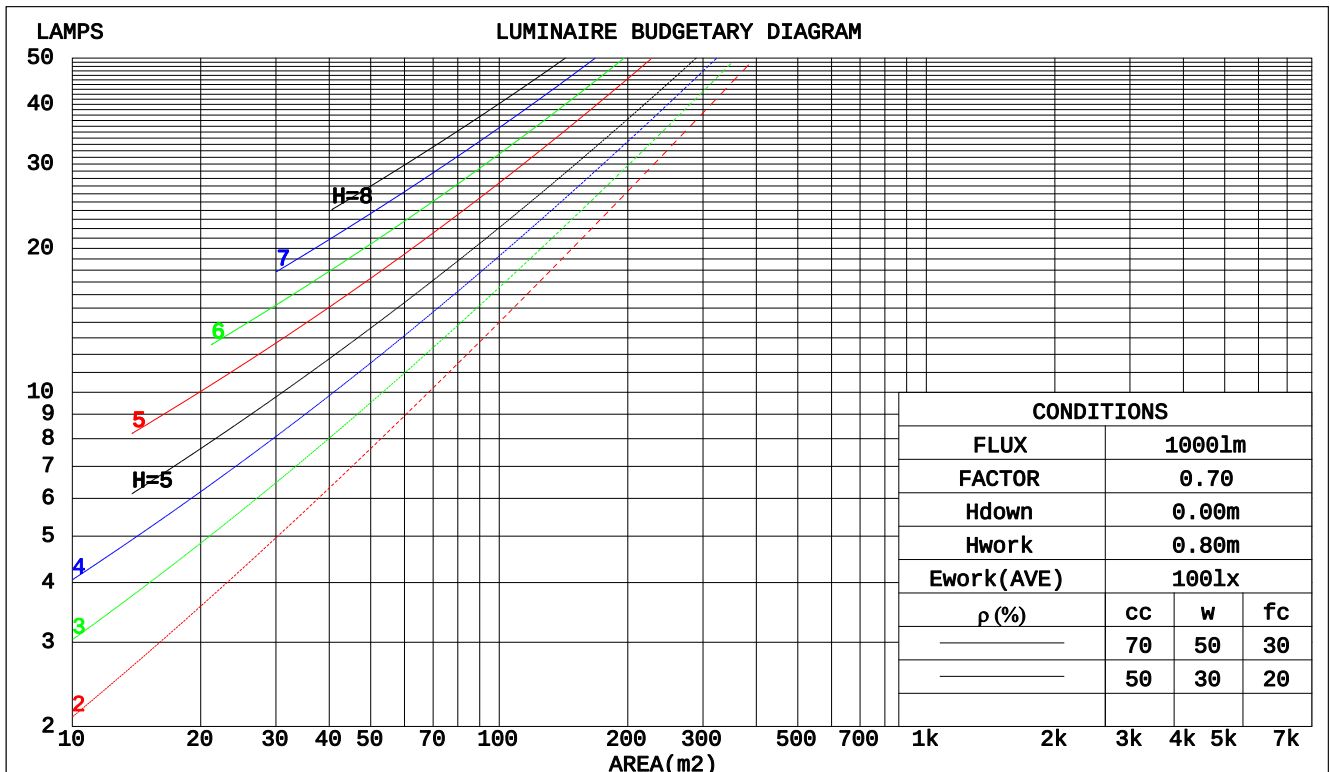

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:01
 Test Date:2021-3-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.275
 Humidity:45%
 Test Distance:14.900m [K=1.0000]
 Remarks: 590*590

WEC AND CCEC

Test:U:229.9V I:0.1567A P:34.01W PF:0.9442 Lamp Flux:3646.9x1 lm		
NAME: LED Linear Panel Light	TYPE:600x600	WEIGHT:
DIM.: 590*590*16mm	SPEC.:	SERIAL No.:
MFR.: Tsong	SUR.:0.573*0.573-0.543*0.543 PROTECTION ANGLE:	

ρcc	80%			70%			50%			30%			10%			0	
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)										
0.0																	
1.0	.345	.196	.062	.338	.193	.061	.325	.186	.060	.312	.180	.058	.301	.174	.056		
2.0	.317	.174	.053	.311	.171	.053	.299	.166	.052	.288	.162	.051	.278	.157	.050		
3.0	.289	.154	.046	.284	.152	.046	.273	.148	.045	.263	.144	.044	.254	.141	.044		
4.0	.264	.137	.040	.259	.136	.040	.250	.132	.040	.241	.129	.039	.233	.127	.039		
5.0	.242	.123	.036	.238	.122	.036	.229	.119	.035	.222	.117	.035	.214	.115	.034		
6.0	.223	.112	.032	.219	.111	.032	.212	.109	.032	.205	.106	.031	.198	.104	.031		
7.0	.207	.102	.029	.203	.101	.029	.196	.099	.029	.190	.098	.028	.184	.096	.028		
8.0	.192	.094	.026	.189	.093	.026	.183	.091	.026	.178	.090	.026	.172	.088	.026		
9.0	.179	.087	.024	.177	.086	.024	.171	.085	.024	.166	.083	.024	.162	.082	.024		
10.0	.168	.081	.022	.166	.080	.022	.161	.079	.022	.156	.078	.022	.152	.077	.022		

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.183	.156	.132	.156	.134	.113	.107	.092	.078	.062	.053	.046	.020	.017	.015	
2.0	.176	.132	.095	.150	.113	.082	.103	.078	.057	.059	.046	.034	.019	.015	.011	
3.0	.168	.114	.072	.144	.099	.062	.099	.069	.044	.057	.040	.026	.018	.013	.008	
4.0	.161	.101	.056	.138	.088	.049	.095	.061	.034	.055	.036	.020	.018	.012	.007	
5.0	.153	.091	.045	.131	.079	.040	.090	.055	.028	.052	.032	.017	.017	.011	.005	
6.0	.145	.083	.038	.125	.072	.033	.086	.050	.023	.050	.030	.014	.016	.010	.005	
7.0	.138	.076	.032	.119	.066	.028	.082	.046	.020	.048	.027	.012	.015	.009	.004	
8.0	.132	.070	.028	.113	.061	.024	.078	.043	.017	.046	.025	.010	.015	.008	.003	
9.0	.125	.065	.025	.108	.057	.021	.075	.040	.015	.044	.023	.009	.014	.008	.003	
10.0	.119	.061	.022	.103	.053	.019	.071	.037	.014	.042	.022	.008	.014	.007	.003	

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:01
Test Date:2021-3-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.275
Humidity:45%
Test Distance:14.900m [K=1.0000]
Remarks: 590*590

Uncorrected UGR Table

Test:U:229.9V I:0.1567A P:34.01W PF:0.9442 Lamp Flux:3646.9x1 lm											
NAME: LED Linear Panel Light					TYPE:600x600			WEIGHT:			
DIM.: 590*590*16mm					SPEC.:			SERIAL No.:			
MFR.: Tsong					SUR.:0.573*0.573-0.543*0.543			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	25.0	26.6	25.3	26.8	27.0	25.1	26.7	25.4	26.9	27.1
	3H	26.8	28.3	27.1	28.6	28.8	27.0	28.5	27.3	28.7	29.0
	4H	27.7	29.1	28.0	29.3	29.6	27.9	29.3	28.2	29.6	29.8
	6H	28.4	29.7	28.7	30.0	30.3	28.7	30.0	29.0	30.3	30.6
	8H	28.7	30.0	29.0	30.3	30.6	28.9	30.2	29.2	30.5	30.8
	12H	29.0	30.2	29.3	30.5	30.8	28.9	30.1	29.2	30.4	30.7
4H	2H	25.8	27.2	26.1	27.5	27.7	25.9	27.3	26.2	27.6	27.8
	3H	27.9	29.1	28.2	29.4	29.7	28.0	29.2	28.3	29.5	29.8
	4H	28.9	30.0	29.2	30.3	30.7	29.0	30.2	29.4	30.5	30.9
	6H	29.7	30.8	30.2	31.1	31.5	30.0	31.1	30.4	31.4	31.8
	8H	30.1	31.1	30.5	31.4	31.8	30.3	31.2	30.7	31.6	32.0
	12H	30.4	31.3	30.9	31.7	32.1	30.3	31.2	30.7	31.6	32.0
8H	4H	29.4	30.3	29.8	30.7	31.1	29.5	30.5	29.9	30.8	31.2
	6H	30.5	31.3	31.0	31.7	32.2	30.8	31.6	31.2	32.0	32.4
	8H	31.1	31.8	31.5	32.2	32.7	31.1	31.8	31.6	32.3	32.7
	12H	31.6	32.2	32.0	32.6	33.1	31.1	31.8	31.6	32.2	32.7
12H	4H	29.4	30.3	29.9	30.7	31.1	29.6	30.5	30.0	30.9	31.3
	6H	30.7	31.5	31.2	31.9	32.3	31.0	31.7	31.4	32.1	32.6
	8H	31.4	32.0	31.9	32.5	32.9	31.4	32.0	31.8	32.4	32.9
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.3					+ 0.1 / - 0.2					
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 3647 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.5)

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:01
Test Date:2021-3-27

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.275
Humidity:45%
Test Distance:14.900m [K=1.0000]
Remarks: 590*590

UTILIZATION FACTORS TABLE

Test:U:229.9V I:0.1567A P:34.01W PF:0.9442 Lamp Flux:3646.9x1 lm		
NAME: LED Linear Panel Light	TYPE:600x600	WEIGHT:
DIM.: 590*590*16mm	SPEC.:	SERIAL No.:
MFR.: Tsong	SUR.:0.573*0.573-0.543*0.543	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	55	43	35	54	42	35	53	42	35	28
0.80	65	52	44	63	52	44	62	51	44	37
1.00	73	61	53	72	60	53	69	62	52	45
1.25	80	69	61	78	68	61	76	66	60	52
1.50	85	74	67	83	74	66	80	72	65	57
2.00	92	83	76	90	82	75	87	79	74	65
2.50	97	88	81	94	87	80	90	84	79	70
3.00	100	93	86	98	91	85	94	88	83	74
4.00	105	98	93	102	96	92	98	93	89	80
5.00	107	102	97	105	100	96	100	96	93	83
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:01
Test Date:2021-3-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.275
Humidity:45%
Test Distance:14.900m [K=1.0000]
Remarks: 590*590

ISOCANDELA DIAGRAM

Test:U:229.9V I:0.1567A P:34.01W PF:0.9442 Lamp Flux:3646.9x1 lm		
NAME: LED Linear Panel Light	TYPE:600x600	WEIGHT:
DIM.: 590*590*16mm	SPEC.:	SERIAL No.:
MFR.: Tsong	SUR.:0.573*0.573-0.543*0.543	PROTECTION ANGLE:

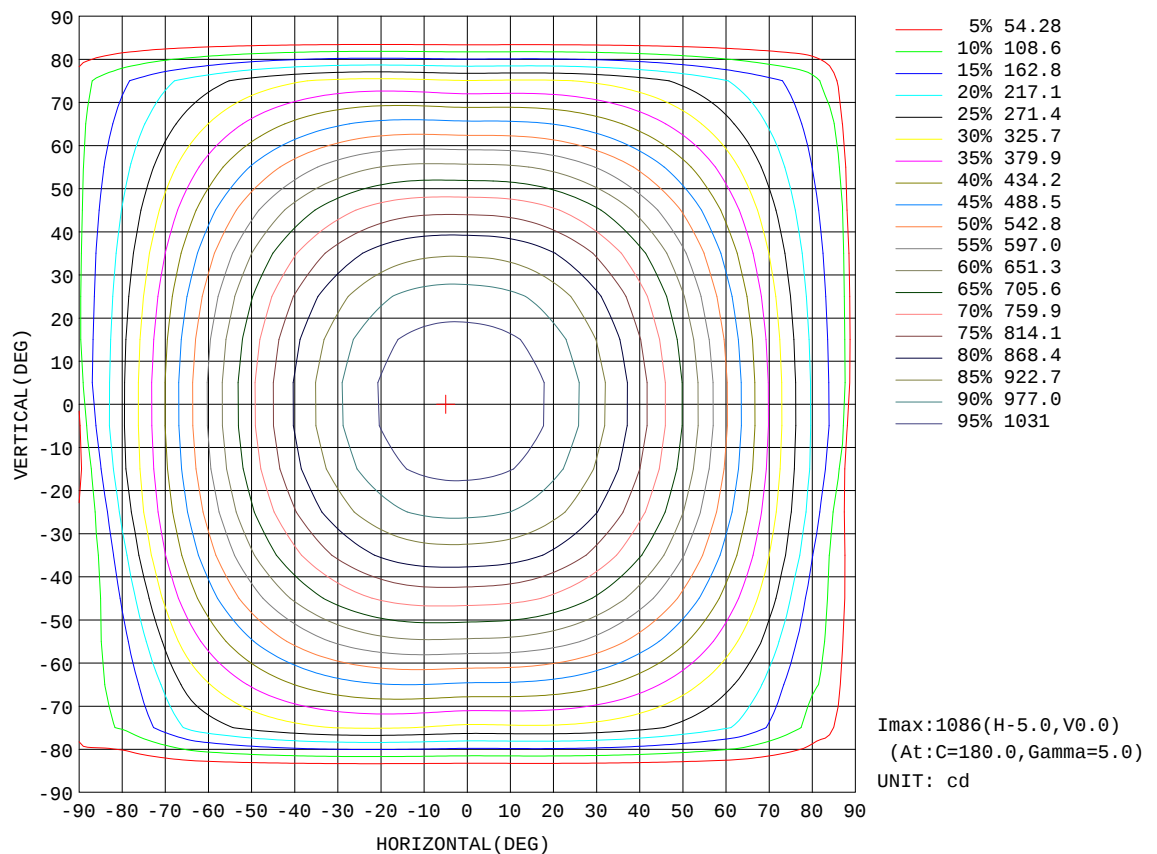


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:01
Test Date:2021-3-27

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.275
Humidity:45%
Test Distance:14.900m [K=1.0000]
Remarks: 590*590

AAI Figure

Test:U:229.9V I:0.1567A P:34.01W PF:0.9442 Lamp Flux:3646.9x1 lm		
NAME: LED Linear Panel Light	TYPE:600x600	WEIGHT:
DIM.: 590*590*16mm	SPEC.:	SERIAL No.:
MFR.: Tsong	SUR.:0.573*0.573-0.543*0.543	PROTECTION ANGLE:

Flux out:2794 lm

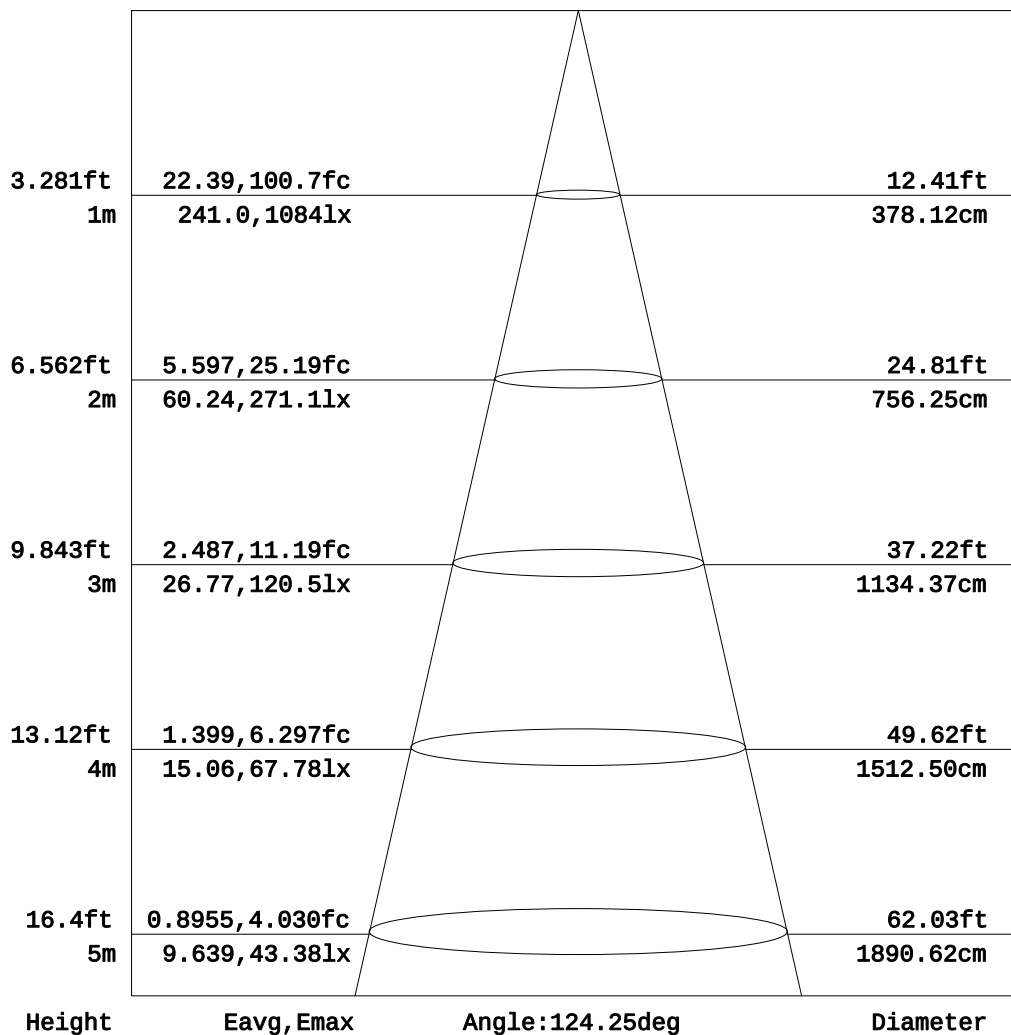


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:01
Test Date:2021-3-27

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.275
Humidity:45%
Test Distance:14.900m [K=1.0000]
Remarks: 590*590

ISOLUX DIAGRAM


Test:U:229.9V I:0.1567A P:34.01W PF:0.9442 Lamp Flux:3646.9x1 lm		
NAME: LED Linear Panel Light	TYPE:600x600	WEIGHT:
DIM.: 590*590*16mm	SPEC.:	SERIAL No.:
MFR.: Tsong	SUR.:0.573*0.573-0.543*0.543	PROTECTION ANGLE:

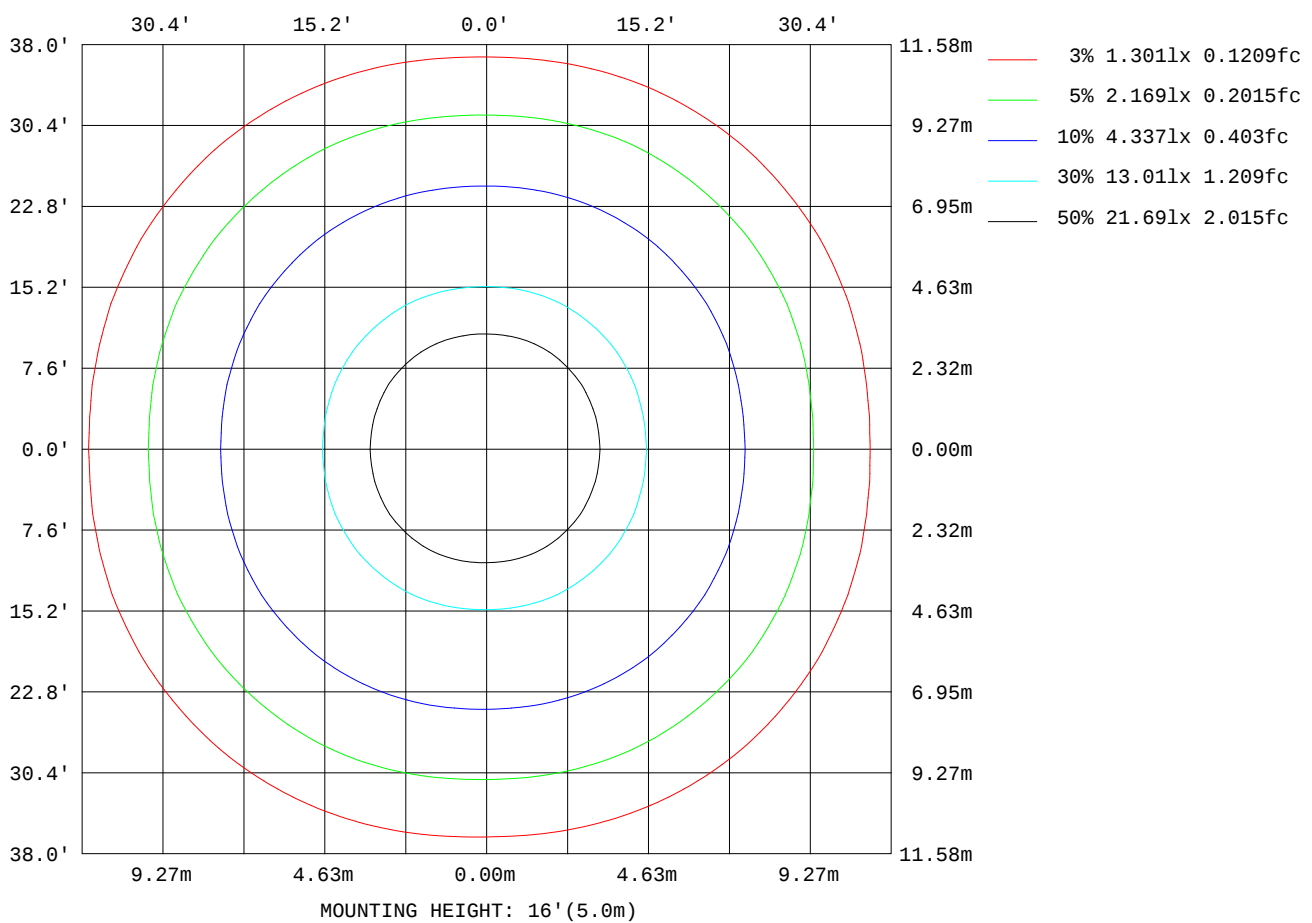

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: 01
 Test Date: 2021-3-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000H_V1 SYSTEM V2.0.275
 Humidity: 45%
 Test Distance: 14.900m [K=1.0000]
 Remarks: 590*590

Planar Illuminance Curve

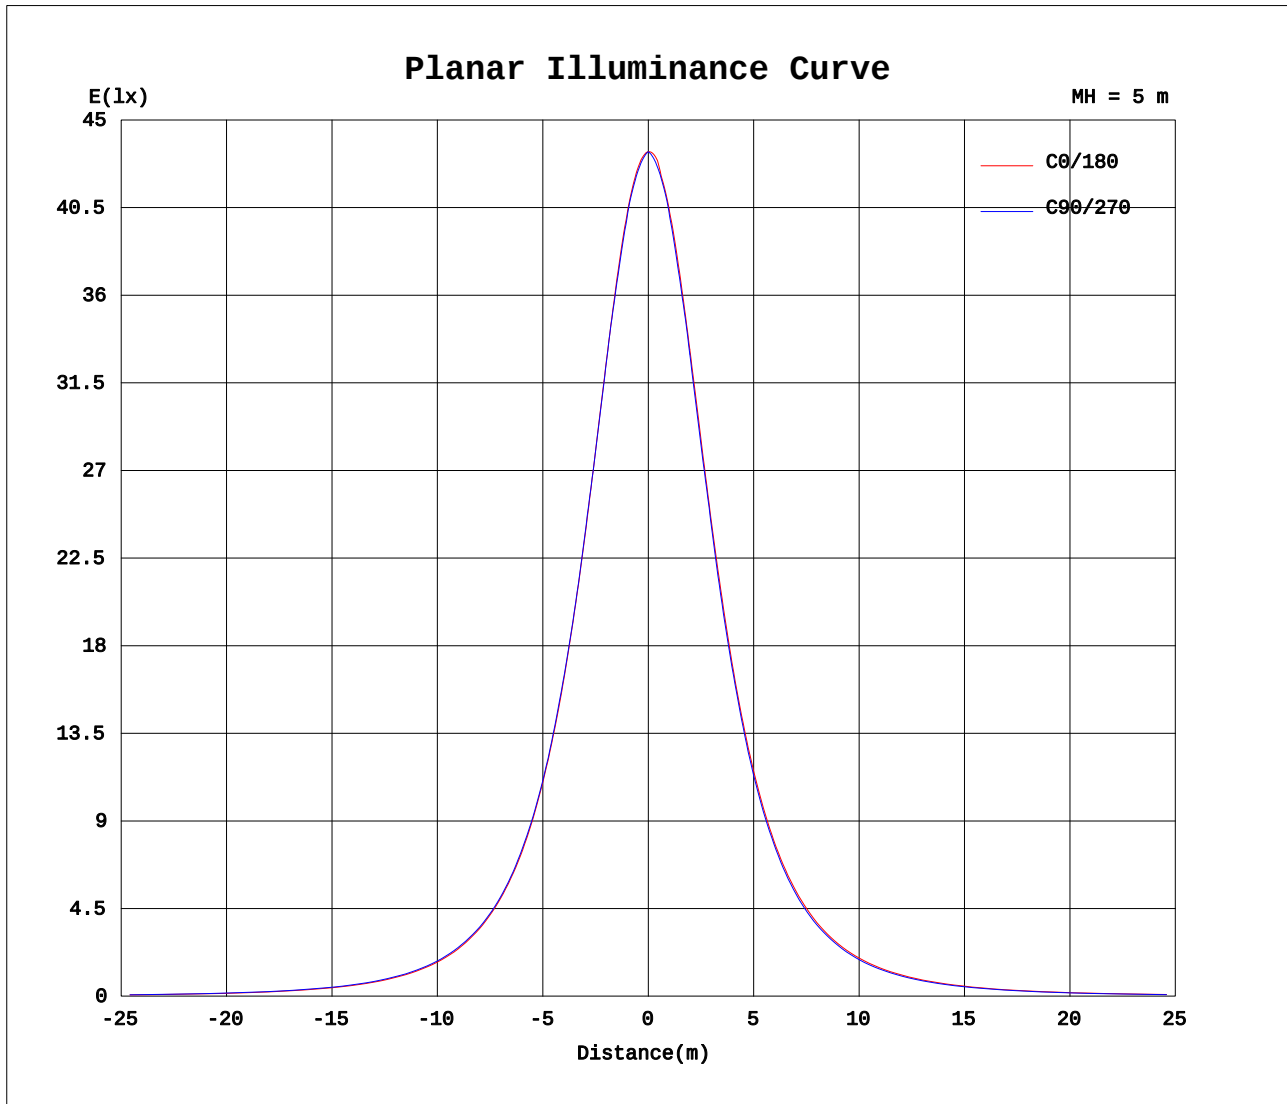

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: 01
Test Date: 2021-3-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000H_V1 SYSTEM V2.0.275
Humidity: 45%
Test Distance: 14.900m [K=1.0000]
Remarks: 590*590

Photometric Data Table [cd]

G/C	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0
0.0	1084	1084	1084	1084	1084	1084	1084	1084	1084	1084
2.5	1083	1082	1082	1082	1081	1081	1081	1080	1080	1080
5.0	1080	1079	1078	1078	1077	1077	1076	1076	1076	1076
7.5	1076	1075	1074	1073	1072	1072	1071	1071	1071	1070
10.0	1070	1068	1067	1066	1066	1065	1065	1065	1065	1065
12.5	1062	1060	1059	1058	1058	1058	1058	1058	1058	1058
15.0	1052	1050	1049	1048	1048	1048	1049	1049	1050	1049
17.5	1040	1038	1037	1036	1036	1037	1038	1039	1038	1037
20.0	1026	1024	1022	1022	1022	1023	1025	1023	1023	1023
22.5	1010	1007	1006	1006	1007	1009	1007	1007	1007	1008
25.0	991.0	988.2	987.0	987.4	989.1	989.5	989.1	989.6	990.8	992.4
27.5	970.1	967.3	966.4	967.3	969.7	968.9	969.5	971.1	973.4	975.6
30.0	947.3	944.5	944.0	945.7	946.9	946.9	948.5	951.4	954.1	953.0
32.5	923.1	920.3	920.3	922.8	922.9	923.9	926.6	930.6	929.8	929.9
35.0	896.9	894.2	894.7	897.7	897.6	899.8	904.0	904.7	905.0	906.2
37.5	869.9	867.1	867.9	870.1	871.0	874.6	877.9	878.1	879.8	882.2
40.0	840.3	837.7	839.4	840.9	843.1	848.4	849.2	850.8	854.0	856.2
42.5	809.3	806.9	809.4	810.6	814.2	818.3	819.6	822.9	826.4	825.5
45.0	777.3	774.9	778.0	779.0	784.2	786.5	789.3	794.5	794.1	794.5
47.5	743.3	741.2	744.3	746.2	752.3	753.8	758.5	760.7	761.5	763.4
50.0	707.7	706.0	708.9	712.1	716.9	720.4	725.6	726.3	728.7	732.0
52.5	671.4	669.6	672.1	676.9	680.6	686.6	689.0	691.6	695.9	695.4
55.0	633.2	631.8	634.1	640.4	644.0	650.2	652.3	657.1	658.1	658.9
57.5	593.4	592.7	595.4	601.0	607.2	611.1	615.5	618.8	620.4	622.7
60.0	551.3	552.5	555.6	561.1	568.9	572.0	577.5	579.7	583.1	585.2
62.5	508.2	511.3	515.1	521.0	527.1	533.0	536.5	540.9	544.3	544.4
65.0	465.6	469.0	473.5	480.6	485.3	491.4	496.2	501.2	502.6	504.0
67.5	422.1	425.0	430.0	437.7	444.1	449.3	456.0	458.6	461.5	463.9
70.0	378.1	381.0	387.0	394.1	401.0	408.3	412.6	416.7	420.6	422.1
72.5	334.2	337.2	345.0	351.8	359.1	365.5	370.6	375.4	378.7	380.5
75.0	291.3	294.8	302.5	309.9	318.1	324.0	330.0	334.5	337.6	339.5
77.5	250.5	254.5	260.0	270.0	278.3	285.1	291.2	295.0	298.7	301.8
80.0	211.6	209.5	202.3	217.0	236.7	247.9	254.3	260.0	263.8	265.6
82.5	178.3	153.5	154.5	170.6	190.3	213.0	223.3	227.3	229.6	229.9
85.0	151.9	113.2	125.0	137.0	160.2	182.3	191.0	150.6	118.4	91.98
87.5	112.9	89.66	86.03	105.2	65.56	30.99	0	0	0	0
90.0	8.643	0	0	0	0	0	0	0	0	0

G/C	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0	90.0	95.0
0.0	1084	1084	1084	1084	1084	1084	1084	1084	1084	1084
2.5	1080	1080	1080	1080	1080	1080	1080	1080	1080	1080
5.0	1075	1075	1075	1075	1075	1075	1075	1075	1076	1076
7.5	1070	1070	1070	1070	1070	1071	1071	1071	1071	1071
10.0	1065	1065	1065	1065	1066	1066	1066	1066	1067	1067
12.5	1059	1059	1058	1057	1057	1056	1056	1056	1057	1057
15.0	1048	1047	1047	1046	1046	1046	1046	1046	1046	1047
17.5	1036	1036	1035	1035	1035	1035	1036	1036	1036	1037
20.0	1023	1023	1023	1024	1024	1025	1025	1026	1026	1027
22.5	1009	1010	1011	1010	1009	1008	1007	1007	1008	1009
25.0	994.4	993.6	992.2	991.1	990.0	989.2	988.6	988.5	989.0	990.3
27.5	974.1	973.2	972.4	971.8	971.1	970.4	969.9	969.8	970.4	971.8
30.0	952.5	952.4	952.4	952.4	952.2	951.7	951.3	951.1	951.8	953.4
32.5	930.5	931.3	932.2	932.8	930.5	928.3	926.5	925.5	926.0	927.9
35.0	908.0	909.9	908.2	906.3	904.2	902.2	900.6	899.7	900.1	902.2
37.5	883.9	882.2	880.9	879.5	878.0	876.2	874.7	873.8	874.3	876.4
40.0	854.6	853.8	853.4	852.9	851.7	850.1	848.8	848.0	848.5	850.7
42.5	825.1	825.3	825.8	826.2	823.5	820.3	817.6	815.8	816.1	818.6
45.0	795.5	796.8	795.9	793.7	790.8	787.9	785.2	783.4	783.7	786.3
47.5	765.8	764.0	762.2	760.4	758.1	755.5	752.9	751.0	751.2	753.9
50.0	730.7	729.7	728.6	727.2	725.3	723.0	720.6	718.6	718.8	721.6
52.5	695.4	695.5	695.1	694.1	690.9	687.2	683.7	680.9	680.8	683.9
55.0	660.2	661.3	659.5	656.2	652.7	649.2	645.7	642.9	642.7	646.0
57.5	624.7	622.7	620.6	617.8	614.5	611.1	607.7	604.9	604.7	608.0
60.0	584.4	583.4	581.8	579.5	576.5	573.1	569.8	566.9	566.6	570.1
62.5	544.5	544.2	543.2	541.1	537.0	532.6	528.4	525.0	524.4	528.3
65.0	504.9	504.8	502.6	499.4	495.3	490.8	486.5	482.9	482.2	486.3
67.5	464.1	463.1	461.0	457.9	453.7	449.1	444.5	440.8	440.1	444.3
70.0	422.4	421.6	419.7	416.5	412.2	407.4	402.6	398.7	397.9	402.3
72.5	381.0	380.4	378.4	375.6	371.3	366.2	361.0	356.8	355.8	360.5
75.0	340.8	340.8	338.9	335.5	330.8	325.3	319.5	315.0	313.8	318.6
77.5	303.1	302.2	299.5	295.6	290.5	284.4	278.0	273.1	271.8	276.7
80.0	265.8	264.0	260.4	255.8	250.1	243.5	236.5	231.2	229.7	234.7
82.5	220.1	195.7	174.7	157.5	143.2	131.5	122.4	116.6	114.9	118.4
85.0	70.10	51.91	36.84	24.79	15.36	8.357	3.594	0.8765	0	0.8902

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: 01
 Test Date: 2021-3-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000H_V1 SYSTEM V2.0.275
 Humidity: 45%
 Test Distance: 14.900m [K=1.0000]
 Remarks: 590*590

Photometric Data Table [cd]

87.5	0	0	0	0	0	0	0	0	0	0
90.0	0	0	0	0	0	0	0	0	0	0
G/C	100.0	105.0	110.0	115.0	120.0	125.0	130.0	135.0	140.0	145.0
0.0	1084	1084	1084	1084	1084	1084	1084	1084	1084	1084
2.5	1080	1080	1081	1081	1081	1081	1082	1082	1082	1083
5.0	1076	1076	1077	1077	1078	1078	1078	1079	1080	1080
7.5	1072	1072	1073	1073	1074	1074	1075	1075	1075	1074
10.0	1068	1068	1068	1069	1069	1069	1069	1068	1069	1069
12.5	1065	1069	1060	1061	1062	1064	1064	1064	1064	1064
15.0	1048	1049	1050	1051	1052	1053	1055	1057	1058	1057
17.5	1038	1039	1040	1040	1041	1043	1044	1046	1047	1049
20.0	1028	1028	1029	1030	1031	1032	1033	1034	1035	1037
22.5	1010	1012	1015	1017	1020	1020	1021	1021	1022	1023
25.0	992.0	994.0	996.4	999.1	1002	1005	1008	1007	1007	1007
27.5	973.6	975.8	978.3	980.8	983.4	986.3	989.2	992.6	992.0	991.2
30.0	955.3	957.6	960.0	962.2	964.5	966.7	968.9	971.6	974.7	973.7
32.5	930.7	934.7	938.9	943.5	945.2	946.7	948.1	949.8	952.0	955.0
35.0	905.1	909.0	913.2	917.7	922.2	926.2	926.8	927.5	928.6	930.5
37.5	879.4	883.4	887.6	891.8	895.9	899.8	903.9	904.6	904.6	905.5
40.0	853.7	857.7	861.9	865.8	869.3	872.6	875.9	879.6	880.2	879.6
42.5	822.7	828.2	834.2	839.9	842.8	845.2	847.7	850.5	854.0	853.2
45.0	790.6	796.1	802.1	808.1	813.8	817.8	819.5	821.3	823.4	826.2
47.5	758.5	764.1	769.8	775.4	780.6	785.9	791.1	791.5	792.3	794.1
50.0	726.3	732.0	737.6	742.7	747.5	752.2	756.8	761.5	761.2	761.2
52.5	699.6	696.5	693.6	690.9	687.4	684.7	681.3	678.9	679.7	679.9
55.0	651.9	658.8	665.9	672.7	679.4	684.7	687.3	689.9	692.7	694.9
57.5	614.2	621.1	628.1	634.9	641.2	647.0	652.3	654.1	655.4	657.4
60.0	576.5	583.5	590.5	597.1	603.1	608.4	612.9	617.0	618.3	618.6
62.5	535.3	543.2	551.3	559.2	565.1	569.8	573.7	576.9	580.0	580.2
65.0	493.6	501.7	509.9	517.6	524.8	530.9	534.7	537.0	539.0	540.9
67.5	451.8	460.1	468.5	476.2	483.1	489.0	493.9	497.5	498.4	499.0
70.0	410.0	418.6	427.1	434.8	441.6	447.3	451.9	455.3	458.0	457.6
72.5	368.3	377.2	385.8	393.5	400.2	405.8	410.0	413.1	415.1	415.8
75.0	326.7	335.8	344.6	352.6	359.4	364.8	368.7	371.4	372.8	372.8
77.5	285.0	294.4	303.5	311.7	318.7	324.3	328.5	331.0	331.6	330.7
80.0	243.3	253.0	262.3	270.8	278.0	283.9	288.5	291.4	292.7	291.5
82.5	126.0	136.7	150.4	167.1	187.0	210.9	239.2	252.1	254.3	253.9
85.0	3.699	8.691	16.13	26.30	39.45	55.95	76.22	100.9	131.1	167.6
87.5	0	0	0	0	0	0	0	0	0	0
90.0	0	0	0	0	0	0	0	0	0	0
G/C	150.0	155.0	160.0	165.0	170.0	175.0	180.0	185.0	190.0	195.0
0.0	1084	1084	1084	1084	1084	1084	1084	1084	1084	1084
2.5	1083	1083	1084	1084	1084	1085	1085	1085	1085	1084
5.0	1081	1082	1082	1083	1084	1085	1086	1085	1084	1083
7.5	1074	1074	1074	1075	1075	1076	1076	1076	1076	1075
10.0	1069	1069	1070	1070	1071	1072	1073	1072	1072	1071
12.5	1064	1064	1064	1065	1065	1066	1068	1067	1066	1066
15.0	1057	1057	1057	1057	1058	1059	1060	1059	1059	1058
17.5	1049	1048	1048	1048	1048	1049	1051	1050	1049	1049
20.0	1039	1038	1037	1036	1037	1037	1039	1038	1038	1038
22.5	1024	1026	1024	1023	1023	1024	1026	1025	1024	1025
25.0	1008	1010	1010	1008	1007	1008	1010	1009	1009	1011
27.5	990.9	991.5	993.2	990.8	989.8	990.4	992.6	991.4	991.9	994.0
30.0	972.3	971.9	972.8	971.9	970.3	970.7	973.1	971.7	972.3	975.0
32.5	952.5	950.9	951.0	951.5	949.3	949.5	952.0	950.4	951.2	954.4
35.0	931.9	929.1	928.1	929.3	926.9	926.6	929.0	927.3	928.4	931.9
37.5	907.6	906.2	903.9	904.3	902.6	901.4	903.5	901.9	903.8	906.5
40.0	880.5	882.0	878.3	877.5	876.7	874.6	876.5	875.0	877.5	879.6
42.5	852.5	853.8	851.6	849.4	849.0	846.1	847.9	846.6	849.8	851.5
45.0	823.7	823.7	823.7	819.6	819.4	815.8	817.6	816.4	820.6	822.2
47.5	794.4	792.4	793.3	788.5	787.3	784.2	785.9	784.9	788.8	791.5
50.0	762.7	760.3	759.3	756.2	753.5	750.9	752.6	751.8	755.5	759.6
52.5	727.7	727.5	724.3	722.9	718.6	716.3	717.8	717.2	720.7	726.5
55.0	692.4	692.4	688.9	688.3	682.5	680.3	681.6	681.2	684.7	692.0
57.5	657.1	654.8	653.0	650.0	645.5	643.0	644.0	644.0	647.8	653.6
60.0	620.2	617.2	615.7	611.0	607.4	604.3	604.9	605.4	609.7	614.6
62.5	579.7	579.6	575.3	571.6	568.5	564.7	564.8	565.7	570.7	575.0
65.0	539.6	538.7	535.1	531.7	528.3	523.4	523.6	524.3	530.3	534.8
67.5	499.5	496.4	495.2	489.6	485.2	480.7	481.1	481.6	487.0	492.5
70.0	456.3	454.7	451.4	446.8	441.9	437.6	437.8	438.2	443.4	449.4
72.5	414.0	411.1	407.7	404.6	398.7	394.2	394.0	394.6	400.1	407.1
75.0	371.6	368.4	364.5	358.6	353.9	351.0	349.9	351.2	355.9	362.1
77.5	329.1	326.3	318.8	303.9	298.5	306.3	306.4	307.5	312.7	318.4

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: 01
Test Date: 2021-3-27

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000H_V1 SYSTEM V2.0.275
Humidity: 45%
Test Distance: 14.900m [K=1.0000]
Remarks: 590*590

Photometric Data Table [cd]

80.0	288.3	284.8	269.1	247.7	235.8	248.8	264.3	264.1	269.5	275.5
82.5	251.7	245.1	222.2	200.1	182.4	184.1	225.1	224.3	229.1	235.7
85.0	213.4	207.6	185.7	161.8	140.6	128.6	189.5	187.2	192.3	198.2
87.5	0	35.14	75.08	124.2	113.4	108.2	153.6	148.2	152.3	149.5
90.0	0	0	0	0	0	0	81.23	0	0	0
G/C	200.0	205.0	210.0	215.0	220.0	225.0	230.0	235.0	240.0	245.0
0.0	1084	1084	1084	1084	1084	1084	1084	1084	1084	1084
2.5	1084	1084	1083	1083	1083	1082	1082	1082	1082	1081
5.0	1083	1082	1082	1081	1080	1080	1080	1079	1079	1078
7.5	1075	1075	1075	1076	1076	1076	1076	1076	1075	1075
10.0	1071	1071	1070	1070	1070	1071	1071	1071	1072	1071
12.5	1065	1065	1066	1066	1066	1067	1067	1067	1066	1065
15.0	1058	1059	1059	1060	1061	1060	1059	1058	1057	1056
17.5	1050	1051	1052	1052	1051	1050	1049	1048	1048	1047
20.0	1039	1041	1042	1041	1040	1039	1039	1039	1038	1038
22.5	1027	1029	1028	1028	1028	1028	1028	1028	1029	1027
25.0	1013	1014	1013	1013	1014	1016	1017	1015	1012	1009
27.5	997.2	996.2	996.5	997.7	999.7	1002	999.0	996.5	994.0	991.8
30.0	977.0	977.1	978.4	980.9	982.9	980.7	979.0	977.4	975.7	974.0
32.5	954.9	956.1	958.9	962.6	960.6	959.3	958.6	957.9	956.9	956.0
35.0	932.1	934.3	938.3	938.3	937.5	937.4	937.7	938.0	934.5	930.8
37.5	907.8	911.6	914.3	913.8	913.8	915.0	915.3	912.0	908.8	905.5
40.0	882.3	887.6	887.5	887.9	889.7	890.4	887.7	885.3	883.0	880.2
42.5	855.6	859.6	859.8	861.9	863.9	861.6	859.9	858.5	857.0	854.9
45.0	827.8	829.5	831.2	835.1	833.6	832.6	832.1	831.5	828.5	823.4
47.5	797.8	798.5	802.2	803.2	802.8	803.3	804.0	799.8	795.7	791.2
50.0	764.0	766.8	770.9	770.6	771.9	773.6	769.9	766.5	763.0	758.9
52.5	729.3	734.2	736.0	737.7	740.8	738.0	735.4	733.0	730.3	726.6
55.0	693.9	699.0	700.6	704.6	703.7	702.2	700.9	699.5	695.3	689.2
57.5	658.0	661.4	665.2	667.0	666.5	666.6	666.1	661.6	657.0	651.4
60.0	620.6	623.5	628.2	628.1	629.4	629.6	626.3	622.7	618.7	613.5
62.5	580.0	585.7	587.4	589.4	590.8	588.9	586.7	583.9	580.5	575.6
65.0	539.5	544.5	546.9	549.7	549.1	548.5	547.2	544.6	539.4	532.9
67.5	499.3	502.0	506.5	507.2	507.9	508.4	505.7	501.6	496.6	490.3
70.0	455.3	460.2	462.8	465.2	466.7	465.0	462.5	458.8	454.0	447.7
72.5	411.3	416.1	420.1	422.8	422.9	421.7	419.6	416.2	411.5	405.4
75.0	367.7	372.7	376.8	378.8	379.5	378.9	377.2	374.4	370.0	363.8
77.5	324.0	329.5	332.9	335.5	337.4	337.7	336.2	333.2	328.6	322.2
80.0	282.1	286.7	290.9	295.3	297.6	297.3	295.5	292.2	287.3	280.7
82.5	241.8	248.0	253.5	257.0	258.4	257.3	245.3	217.2	193.5	173.3
85.0	206.9	213.0	214.5	169.5	133.2	102.9	78.16	57.63	40.81	27.29
87.5	84.73	36.34	0	0	0	0	0	0	0	0
90.0	0	0	0	0	0	0	0	0	0	0
G/C	250.0	255.0	260.0	265.0	270.0	275.0	280.0	285.0	290.0	295.0
0.0	1084	1084	1084	1084	1084	1084	1084	1084	1084	1084
2.5	1081	1081	1081	1081	1081	1081	1081	1081	1081	1081
5.0	1078	1078	1077	1077	1077	1077	1077	1077	1076	1076
7.5	1075	1074	1074	1074	1073	1073	1073	1073	1072	1072
10.0	1071	1071	1070	1070	1070	1069	1069	1069	1068	1068
12.5	1064	1063	1062	1061	1061	1060	1060	1060	1060	1060
15.0	1055	1054	1053	1053	1052	1051	1051	1051	1051	1051
17.5	1046	1045	1045	1044	1043	1042	1042	1042	1041	1041
20.0	1037	1036	1036	1035	1034	1033	1033	1032	1032	1031
22.5	1024	1022	1020	1018	1017	1016	1016	1017	1018	1019
25.0	1007	1005	1003	1001	1000.0	999.2	999.2	999.5	1000.0	1001
27.5	989.7	988.0	986.3	984.4	982.9	982.1	981.9	982.0	982.2	982.3
30.0	972.4	970.8	969.4	967.6	965.9	964.9	964.6	964.4	964.3	963.9
32.5	952.1	948.5	945.5	942.9	940.9	940.4	941.1	942.2	943.7	945.4
35.0	927.0	923.4	920.4	917.8	915.9	915.6	916.5	917.4	918.5	919.6
37.5	902.0	898.4	895.2	892.7	890.9	890.9	892.0	892.6	893.2	893.7
40.0	877.0	873.4	870.0	867.6	865.9	866.2	867.5	867.8	867.9	867.6
42.5	850.0	844.4	839.4	836.0	833.9	834.5	836.6	838.5	840.4	841.4
45.0	818.2	812.7	807.7	804.1	801.9	802.4	804.4	806.4	808.2	809.5
47.5	786.3	781.1	776.1	772.2	769.9	770.3	772.3	774.4	776.1	777.0
50.0	754.4	749.4	744.4	740.3	737.9	738.3	740.2	742.4	744.1	744.4
52.5	720.7	714.0	707.7	702.6	699.9	700.6	703.3	706.8	710.3	711.9
55.0	682.9	676.3	669.9	664.6	661.9	662.7	665.4	668.7	671.8	674.1
57.5	645.1	638.6	632.1	626.6	623.8	624.8	627.6	630.6	633.5	636.0
60.0	607.3	600.9	594.3	588.7	585.8	586.9	589.7	592.5	595.4	597.9
62.5	567.7	560.0	552.4	545.9	542.8	544.1	547.6	551.4	555.7	559.8
65.0	525.2	517.4	509.7	503.0	499.8	501.2	504.8	508.9	513.1	516.7
67.5	482.7	474.8	466.9	460.0	456.7	458.2	461.9	466.5	470.5	473.9
70.0	440.2	432.3	424.2	417.1	413.7	415.3	419.1	424.2	428.0	431.3

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: 01
 Test Date: 2021-3-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000H_V1 SYSTEM V2.0.275
 Humidity: 45%
 Test Distance: 14.900m [K=1.0000]
 Remarks: 590*590

Photometric Data Table [cd]

72.5	398.1	390.0	381.7	374.4	370.9	372.7	376.9	382.1	386.0	389.2
75.0	356.3	347.9	339.3	331.7	328.1	330.1	334.8	340.1	344.5	348.1
77.5	314.5	305.8	296.9	289.0	285.3	287.5	292.7	298.1	303.1	307.1
80.0	272.7	263.6	254.4	246.2	242.5	244.8	250.5	256.2	261.8	266.3
82.5	156.4	142.6	131.8	124.2	121.2	123.5	129.7	138.4	149.9	164.0
85.0	16.78	9.060	3.868	0.9337	0	0.9284	3.808	8.794	16.08	25.81
87.5	0	0	0	0	0	0	0	0	0	0
90.0	0	0	0	0	0	0	0	0	0	0
G/C	300.0	305.0	310.0	315.0	320.0	325.0	330.0	335.0	340.0	345.0
0.0	1084	1084	1084	1084	1084	1084	1084	1084	1084	1084
2.5	1081	1081	1081	1081	1081	1081	1081	1081	1081	1082
5.0	1076	1076	1076	1076	1077	1077	1077	1077	1078	1078
7.5	1072	1072	1072	1072	1072	1072	1072	1072	1073	1073
10.0	1067	1067	1067	1066	1066	1066	1066	1066	1066	1067
12.5	1061	1061	1061	1060	1059	1059	1059	1058	1058	1059
15.0	1051	1051	1051	1052	1050	1050	1050	1049	1049	1049
17.5	1040	1040	1040	1040	1040	1039	1039	1038	1037	1037
20.0	1030	1029	1028	1027	1026	1026	1026	1025	1023	1023
22.5	1019	1017	1015	1013	1012	1011	1010	1010	1008	1007
25.0	1001	1002	1002	998.9	996.2	994.0	992.6	992.2	991.1	989.0
27.5	982.3	982.4	982.5	983.0	979.6	976.2	973.6	972.2	972.3	969.3
30.0	963.2	962.4	961.6	961.0	957.1	957.1	953.3	950.9	950.2	948.4
32.5	943.9	942.1	940.1	938.3	937.1	936.8	932.0	928.5	926.6	925.3
35.0	920.7	921.5	918.2	915.1	912.7	911.4	909.8	904.6	901.2	900.0
37.5	893.9	894.2	894.7	891.6	887.8	885.2	884.0	879.6	874.6	872.1
40.0	867.1	866.3	865.8	865.9	862.5	858.2	855.5	853.8	846.7	842.7
42.5	840.1	838.4	836.9	835.7	835.3	830.6	826.4	823.6	817.4	812.0
45.0	810.7	810.5	807.8	805.3	803.4	802.7	796.3	791.7	787.1	780.3
47.5	777.4	778.1	778.6	774.6	771.2	769.3	766.2	759.2	754.9	747.3
50.0	744.2	744.0	743.7	743.7	738.8	735.2	733.8	726.2	719.8	713.3
52.5	711.0	710.0	708.5	707.1	706.2	700.8	697.1	692.5	683.9	678.2
55.0	675.6	676.0	673.6	670.8	668.5	666.4	660.3	656.1	647.4	641.9
57.5	636.8	637.5	638.2	634.7	630.9	628.2	623.7	617.0	610.5	602.3
60.0	598.0	598.1	597.8	597.3	593.5	588.8	585.8	577.9	572.1	562.2
62.5	559.4	558.8	557.7	556.2	554.5	549.7	544.3	538.9	530.0	521.9
65.0	518.2	519.3	518.0	515.3	512.4	509.7	503.4	496.8	488.1	481.4
67.5	475.5	476.5	476.5	474.9	470.8	466.6	462.7	453.9	446.7	438.2
70.0	433.2	434.0	433.6	432.0	429.4	424.3	418.7	412.4	403.1	394.4
72.5	391.0	391.8	391.1	389.2	386.3	382.2	376.0	369.0	360.6	351.6
75.0	350.3	350.8	349.5	347.1	344.2	339.8	334.1	326.4	318.7	308.7
77.5	309.7	310.7	310.1	307.9	303.7	298.6	293.1	285.7	277.2	268.7
80.0	269.3	270.9	271.1	270.0	266.6	261.4	254.4	247.1	239.2	229.7
82.5	180.7	200.4	223.8	232.7	230.3	226.5	221.1	213.2	204.1	195.3
85.0	38.10	53.13	71.26	92.96	118.3	148.9	186.7	183.7	176.1	166.9
87.5	0	0	0	0	0	0	0	31.36	72.69	132.4
90.0	0	0	0	0	0	0	0	0	0	0
G/C	350.0	355.0								
0.0	1084	1084								
2.5	1082	1082								
5.0	1079	1079								
7.5	1074	1075								
10.0	1068	1069								
12.5	1060	1061								
15.0	1049	1051								
17.5	1037	1038								
20.0	1023	1024								
22.5	1007	1008								
25.0	988.1	988.8								
27.5	967.8	968.0								
30.0	945.8	945.4								
32.5	921.9	921.1								
35.0	896.1	894.9								
37.5	868.9	867.5								
40.0	840.0	837.9								
42.5	809.7	807.1								
45.0	778.1	774.9								
47.5	744.2	741.1								
50.0	709.1	705.9								
52.5	672.3	669.5								
55.0	634.3	631.5								
57.5	595.4	592.2								
60.0	555.6	551.9								
62.5	514.9	510.7								

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:01
Test Date:2021-3-27

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000H_V1 SYSTEM V2.0.275
Humidity:45%
Test Distance:14.900m [K=1.0000]
Remarks: 590*590

Photometric Data Table [cd]

65.0	473.2	468.2
67.5	429.5	424.3
70.0	386.2	380.0
72.5	343.7	336.0
75.0	300.3	292.9
77.5	258.7	251.9
80.0	220.1	213.1
82.5	186.3	179.1
85.0	158.2	151.3
87.5	126.1	123.7
90.0	0	0

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: 01
Test Date: 2021-3-27

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000H_V1 SYSTEM V2.0.275
Humidity: 45%
Test Distance: 14.900m [K=1.0000]
Remarks: 590*590